SETUP VESTA
cameras

VESTA®

Built-in Speaker

Ethernet Port

Power Port

LED Indicator

Lens

Built-in Mic

imou

STEP 1: INSER POWER CABLE

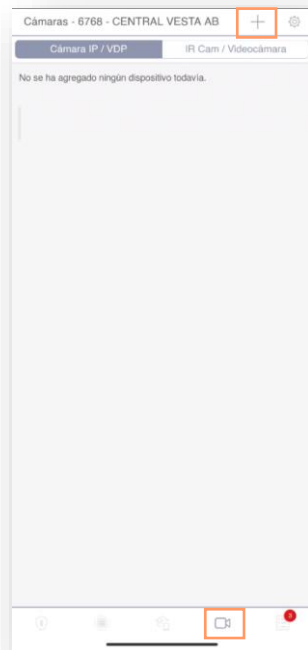**STEP 2:** WAIT FOR THE LED TO REMAIN FIXED IN **GREEN** (ETHERNET CONNECTION) OR FLASHING IN CASE OF WIFI SETUP.

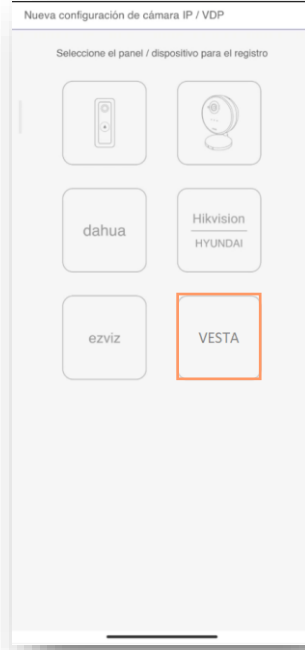Achraf B v.3

VESTA®

Use SmartHomeSec to **initialise** the camera and **add** it to the system
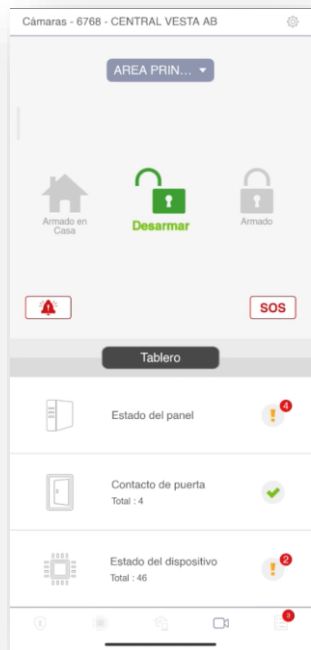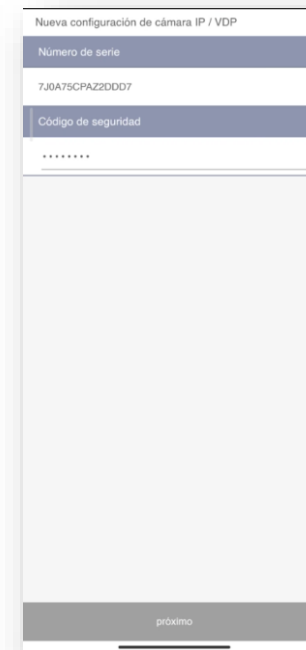

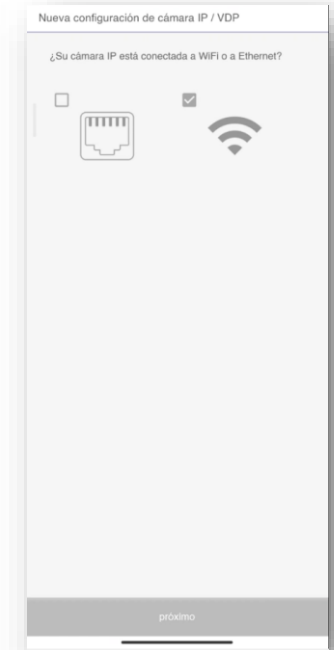**STEP 1:** Login to SmartHomeSec

STEP 2: Chose → Cameras → Add [+]

STEP 3: Chose → VESTA
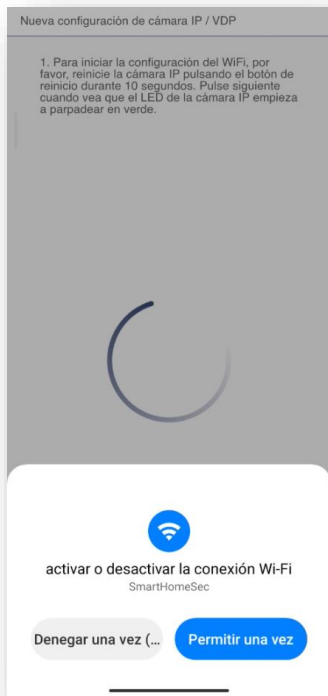
STEP 4: Scan camera QR code

STEP 5: Select next

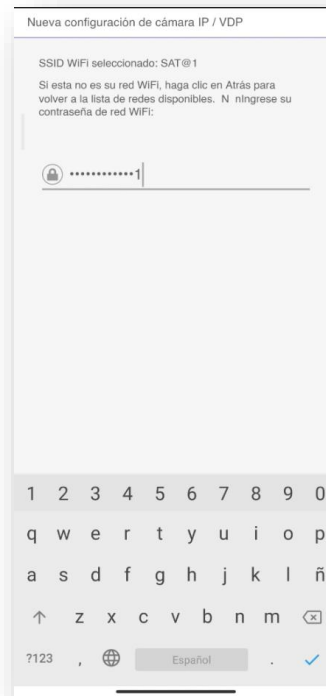**STEP 6:** Chose communication of camera

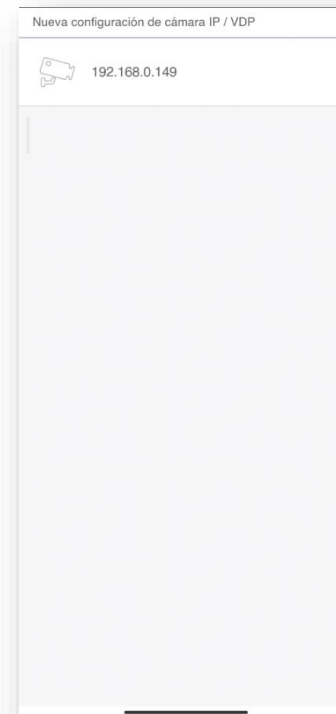Achraf B v.3

SETUP FROM SMARTHOMESEC

STEP 7: Allow the APP to connect to a network on request

STEP 8: Select your WIFI network to which the camera will connect.
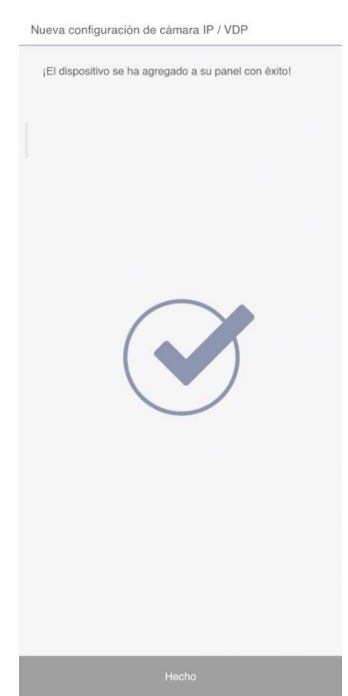

STEP 9: Enter WIFI password
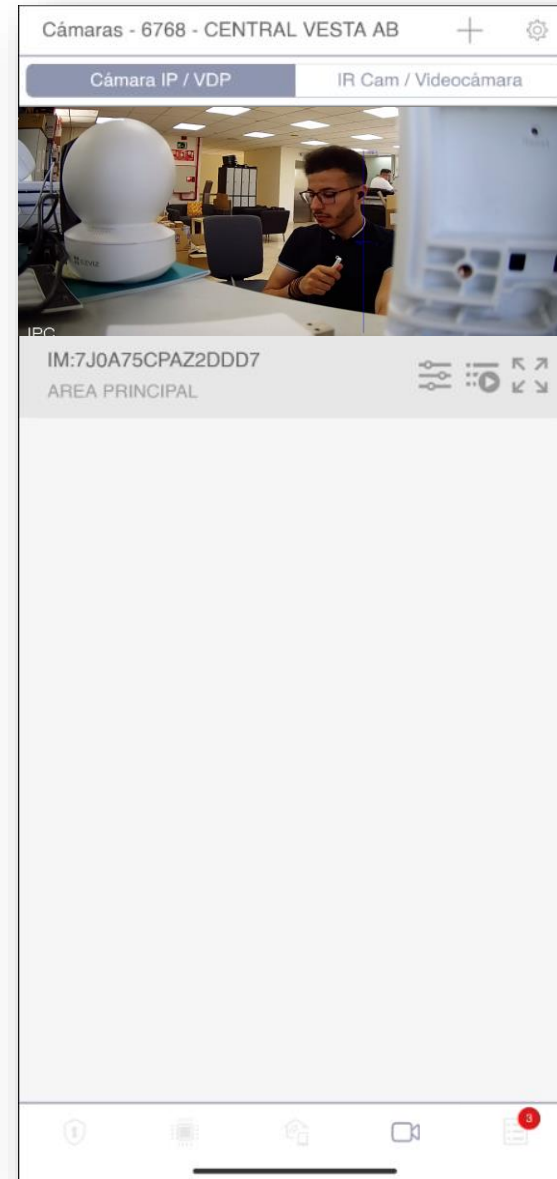

STEP 10: Select IP of camera detected

STEP 11: User name: *admin* Password: *(Verification code of camera, label below)*

SETUP COMPLETED

SETUP COMPLETED

I cannot find the IP of the camera on setup steps:

    1. Ensure that the VESTA central controller is connected to the same network as the camera.
    2. Restart the switch or router where the VESTA panel & Camera is connected.

I cannot complete the setup via WIFI

    1. Check that you have the latest firmware in the VESTA control unit.
    2. Make sure you give the APP permissions to connect to a WIFI network, and if it asks for connection permissions allow them.

The camera is not ready:

    1. Reset camera to factory settings